Polylok 24" Drain Well Kit



INSTRUCTIONS:

This image illustrates suggested inlet and leaching locations. A 41/2" hole saw is recommended when drilling a 4" inlet and/or optional surface drain hole on the lid. Use a 1½" hole saw when drilling leaching locations. No more than twenty 11/2" holes per 12" section is recommended.

The Polylok Drain Well is an easy to install dry well used to collect, retain, and discharge storm water. Our Drain Well allows the flexibility to choose your inlet and leaching locations. The Drain Well cover allows for a 4" surface drain and is equipped with two recessed handles for easy removal. One of our Drain Well's greatest features is its ability to accommodate stacking of Polylok 24" risers to accommodate higher volumes of water.

Features:

- Easy to install one piece design
- Inlet and leaching location flexibility
- Lid will accept a 4" surface drain
- Lid is equipped with two recessed handles
- Accepts any Polylok 24" riser
- Built in anti-flotation ring
- Holds 56 gallons
- Customizable accessories available

Kit Includes:

- 24" Lid
- 24"x12" Riser (QTY: 2)
- 24" Anti-Flotation Ring

Part Number:

3008-DWK



HOLDS

AVAILABLE OPTIONS



24" x 2" Riser Part #: 3008-GR2



24" x 3" Riser Part #: 3008-RP



24" x 6" Riser Part #: 3008



24" x 12" Riser Part #: 3008-R12



24" Basin Part #: 3008-R12B



Flow Gate (overflow release) Part #: PDB-4PE-GN



4" Surface Drain Grate Part #: PDB-4G-BK (Black)



4" Surface Drain Grate Part #: PDB-4G-GN (Green)




24" Heavy Duty Grate Part #: 3008-G24





TECHNICAL SPECIFICATIONS

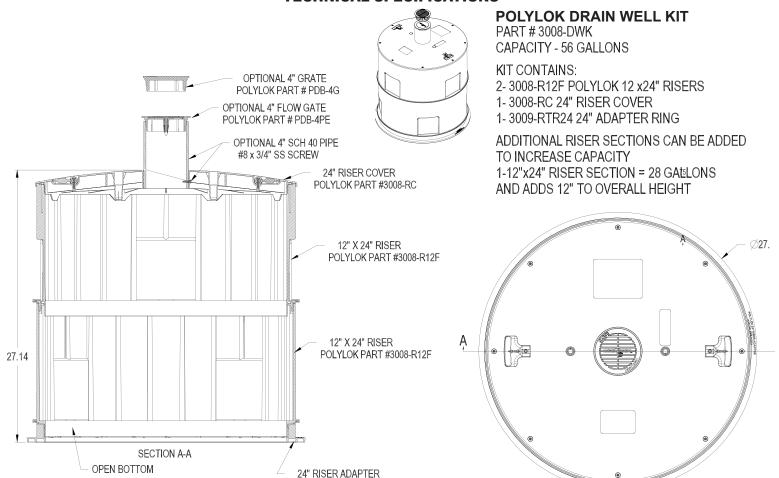

POLYLOK PART # 3009-RTR24